




# SWING GATE TURNSTILES SC-324-C



|                         |   |
|-------------------------|---|
| <b>Body</b>             | : 304 quality stainless steel   |
| <b>Mechanism</b>        | : Motor driven, solenoid locking, belt driven.  |
| <b>Wing</b>             | : 10 mm laser cut plexiglass.   |
| <b>Dimensions</b>       | : 220x320x1050 mm Wing: 500-800 mm, ~32 kg  |
| <b>Opening Time</b>     | : 3 sec   |
| <b>Energy and Power</b> | : 176-264 V AC 50-60 Hz / 24V DC Max:30W  |
| <b>Temperature</b>      | : -10 / +60 °C  |
| <b>Working Mode</b>     | : Bidirectional motorized movement, automatic shutdown, deceleration mode.  |
| <b>Features</b>         | : Operation mode selection, shutdown time setting, pc and service port, warning sound cancellation.                           |
| <b>Outputs</b>          | : Wing status information.  |
| <b>Emergency</b>        | : With the emergency entrance, the turnstile opens in the desired direction, it is opened by pushing manually with no energy. |
| <b>Safety Status</b>    | : With the safety status input, the turnstile goes into locked mode and never opens.  |
| <b>Usage Area</b>       | : Plazas, business centers, schools, municipalities, public institutions, factories.  |
| <b>Option</b>           | : Your logo printed on the wing, RF control card, button, safety sensor, counter foot, reader foot.                           |

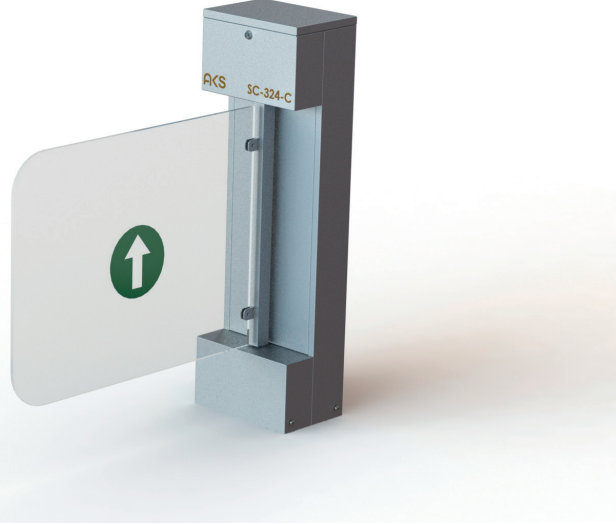